


Tools Required

- Wrenches/sockets: 13, 16,, mm
- Flat-blade screwdriver
- Penetrating lubricant

MK5 Gen2 Rabbit Catback Exhaust Installation

Factory Exhaust Removal

1. Jack up the car and secure it properly.
2. Spray penetrating lubricant on all rusty fasteners to facilitate removal.
3. Move to the back of the car and pull the factory hangers out of each mount.
4. Let the back of the exhaust hang down while you remove the front clamp bolts.
5. Remove the factory system out of the clamp and lower gently.
6. Slip out from under the car and start installing your Eurojet exhaust.

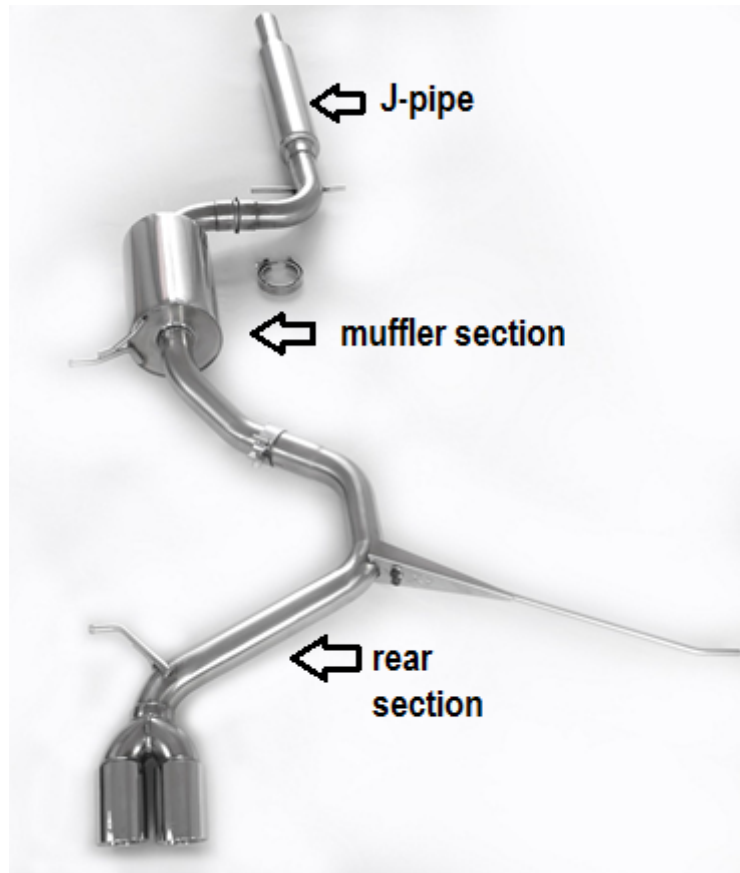

MK5 Gen2 Rabbit Catback Exhaust Installation

1. Install the J-pipe section into the hanger.
2. Place the slip joint connector over the J-pipe, and install the J-pipe over the factory exhaust.
3. Install the muffler section into the hanger, then clamp it with the J-pipe.
4. Install the rear section. Install into hangers first to make it easier to handle, then clamp it to the muffler section. Verify alignment in bumper cutout before the final torque.
5. Move to the front of the car, and tighten all bolts from front to back.
6. Do one final bolt check and fire it up.